


Karakteristike

- Tijelo od čelika ili INOX
- Radni pritisak: PN 16-40 – 16-40 bar
- Priključak: DIN 2545 - 2635
- Radna temperatura -30 °C +250 °C
- Upotreba: zemni plin, LPG –LNG, nafta, komprimirani zrak

Dimenzije:

DN 15, DN20, DN32, DN40, DN50, DN65,
DN80, DN100, DN125, DN150

Batau VANA

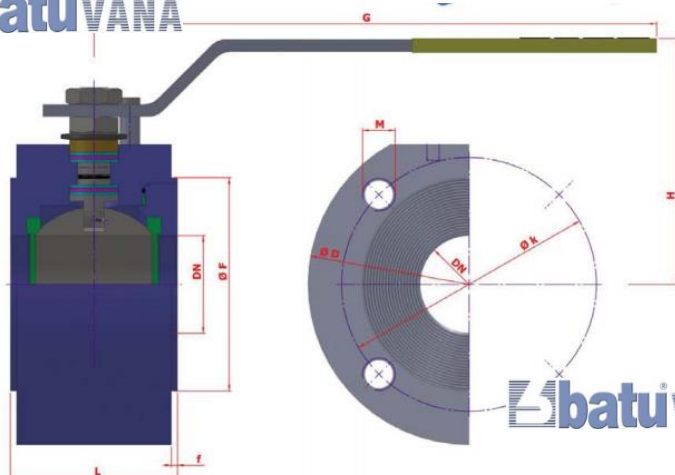

TIP TYPE	DIMENZIJE VENTILA														
							PN 16				PN 40				
BBTKV-FS	L	G	H	DN	f	D	k	Hole Unit	M	F	k	Hole Unit	M	F	Kg
DN 15	38	150	75	15	2	87	65	4	M 12	50	65	4	M 12	50	1,5
DN 20	40	150	83	20	2	97	75	4	M 12	60	75	4	M 12	60	2,0
DN 25	45	180	90	25	2	107	85	4	M 12	68	85	4	M 12	68	2,7
DN 32	58	230	95	32	2	135	100	4	M 16	78	100	4	M 16	78	5,2
DN 40	64	275	115	40	3	145	110	4	M 16	88	110	4	M 16	88	6,8
DN 50	82	275	120	50	3	165	125	4	M 16	105	125	4	M 16	105	11,1
DN 65	103	320	135	65	3	177	145	4	M 16	125	145	8	M 16	125	15,6
DN 80	122	380	150	80	3	197	160	8	M 16	132	160	8	M 16	132	22,3
DN 100	150	450	170	100	3	232	180	8	M 16	158	190	8	M 20	162	37,3
DN 125	200	450	200	125	3	270	210	8	M 16	188	220	8	M 20	188	69,0
DN 150	235	650	235	150	3	305	240	8	M 20	212	250	8	M 22	218	96,0
DN 200	310	900	270	200	3	400	295	12	M 20	268	320	12	M 27	285	215,0
DN 250	470	1100	370	250	3	500	355	12	M 24	320	385	12	M 27	345	475,0

Dimezije: TS EN 331 / TS 9809 / EN 558-1

Priključak: Prirubnica DIN 2544 -2545 /EN 1092-1

Radni pritisak: DN15-50 MOP 5-20 TS EN 331


DN65-100 PN40 TS 9809

DN125-200 PN25 TS 9809

Radna temperatura: -30°C/+180°C

Primjena: LPG, LNG, Dizel gorivo, komprimirani zrak

i drugi gasovi

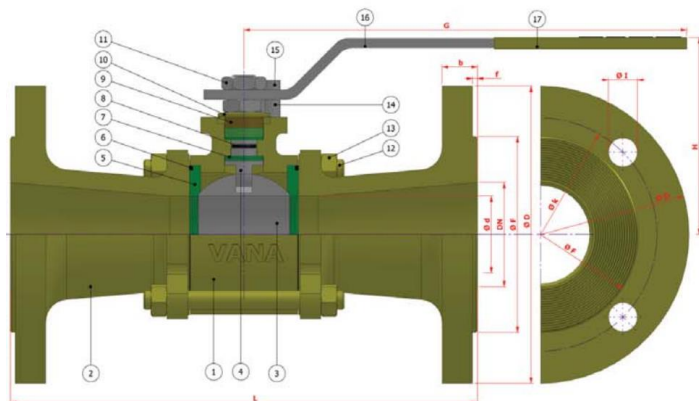

TIP TYPE		DIMENZIJE VENTILA											
		PN 16 / 25 / 40											
		L	G	H	f	d	D	b	k	Hole Unit	I	F	kg
TS EN 331 MOP 5-20 / PN 40	BDKV-FL-RG												
	DN 15 1/2"	130	150	75	2	12	95	14	65	4	14	45	3,0
	DN 20 3/4"	150	150	75	2	15	105	16	75	4	14	58	3,4
	DN 25 1"	160	150	83	2	20	115	16	85	4	14	68	4,0
	DN 32 1 1/4"	180	180	90	2	25	140	16	100	4	18	78	5,6
	DN 40 1 1/2"	200	230	95	3	32	150	16	110	4	18	88	7,2
	DN 50 2"	230	275	115	3	40	165	18	125	4	18	102	10,0
TS 9809 PN 40	DN 65 2 1/2"	290	275	120	3	50	185	18	145	8	18	122	14,6
	DN 80 3"	310	320	135	3	65	200	20	160	8	18	138	20,7
	DN 100 4"	350	380	150	3	80	235	24	290	8	22	162	30,8
	DN 125 5"	400	450	170	3	100	270	26	220	8	26	188	48,0
TS 9809 PN 25	DN 150 6"	450	450	200	3	125	300	28	250	8	26	218	78,7
	DN 200 8"	550	650	235	3	150	360	30	310	12	26	278	
	DN 250 10"	650	900	270	3	200	425	32	370	12	30	335	